

KÄRCHER HD 7/16-4 Cage Classic

The three-phase HD 7/16-4 Cage Classic cold water high-pressure cleaner is extremely robust, user friendly and offers an operating pressure of 160 bar at a maximum throughput rate of 700 l/h from a strong crankshaft pump with ceramic pistons. The HD 7/16-4 Cage Classic has been designed for tough daily operating conditions with an air cooled 4-pole electric motor which operates at 1400 rpm.

Features:

Durable and reliable

- 4-pole electric motor.
- Brass cylinder head and ceramic piston.
- Reliable crankshaft pump with additional thermostat valve.

Robust and secure

- Robust tubular frame construction ensures optimum protection of the machine.
- Built-in handles for transport.

Easy to service


- Excellent access to all relevant components.
- Large water inlet filter for easy servicing.

Versatile

- The machine can be attached to the floor or the wall.
- Practical spray gun storage with automatic machine switch-off (Total Stop included).

Standard Features/Accessories

Standard trigger gun
10 m High pressure hose
100 mm Lance
Power nozzle
Anti-twist system
Crankshaft pump with ceramic pistons
Infinitely variable pressure and water flow regulation
Four-pole, low-speed electric motor

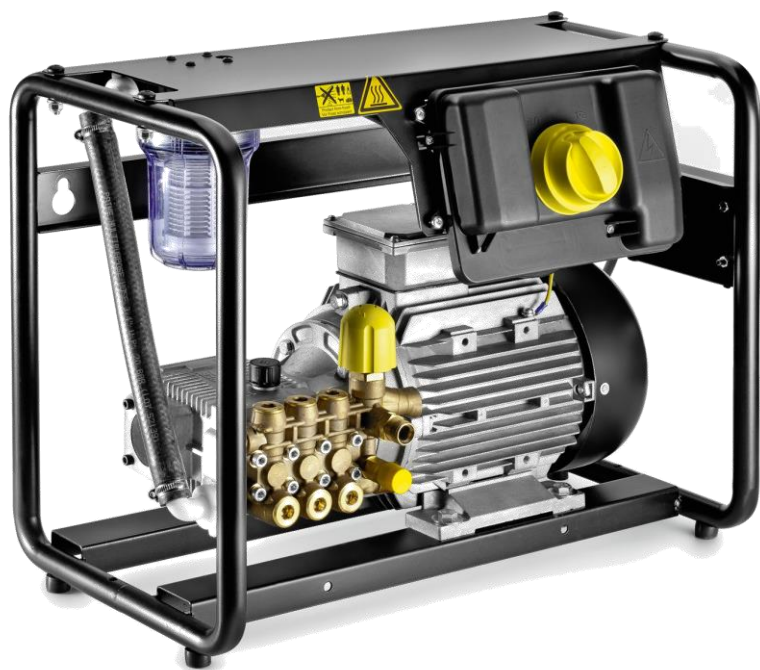

Part no. 1.367-314.0

TECHNICAL SPECIFICATIONS

Current type	3/400/50 Ph/V/Hz
Flow rate	400-700 l/h
Working pressure	70-160/7-16 bar/MPa
Max. pressure	220 bar
Max. water inlet temperature	60 °C
Connected load	4,3 kW
Weight	55 kg
Dimensions (L x W x H)	780 x 360 x 500 mm